

09-26-00

A

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Muhonen, Ahti

Serial No. TO BE ASSIGNED

Corresponding to PCT/FI99/00250, filed 26 March 1999

Filed: September 25, 2000 Docket No.: 781.378USW1

Title: TRANSMISSION OF POINT-TO-MULTIPOINT SERVICES TO A  
DESTINATION AREA
 jc525 U.S. TO  
09/669171  
09/25/00

## CERTIFICATE UNDER 37 C.F.R. 1.10:

'Express Mail' mailing number: EL492432164USDate of Deposit: September 25, 2000

The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

By:

Melissa Lange

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

**REQUEST FOR CONTINUATION OF AN INTERNATIONAL APPLICATION**  
**UNDER 37 C.F.R. §1.53(b)**

This is a request for filing a continuation application under 37 C.F.R. §1.53(b) of prior pending international application number PCT/FI99/00250 filed on 26 March 1999 entitled TRANSMISSION OF POINT-TO-MULTIPOINT SERVICES TO A DESTINATION AREA, which designated the United States.

1. ☒ Enclosed is a patent application containing 17 pages of specification, 5 pages of claims and 3 sheet(s) of drawings.
2. ☒ A preliminary amendment is enclosed.
3. ☒ Please amend the specification by inserting the following paragraph after the title:

This application is a continuation of international application serial number PCT/FI99/00250, filed 26 March 1999.

4. ☐ Small entity status
  - a. ☐ A small entity statement is enclosed.
  - b. ☐ A small entity statement was filed in the prior non provisional application.
  - c. ☐ is no longer claimed.

The filing fee is calculated below

CLAIMS				
	Number Filed	Number Extra	Rate	Fee
Total Claims	18		X \$18.00	\$
Indep. Claims	5		X \$78.00	\$ 156.00
Multiply Dependent Claims				\$
			Basic Fee	\$ 690.00
			TOTAL	\$ 846.00

5. ☒ Payment of filing fees  
☐ A check in the amount of \_\_\_\_\_ is enclosed.  
☐ Please charge Deposit Account Number 50-1038  
☒ Is deferred.
6. ☒ The Commissioner is hereby authorized to credit any overpayment or charge any fees required under 37 C.F.R. §1.16-1.18 to Deposit Account Number 50-1038.
7. ☒ The priority of Finnish application number 980684, filed 26 March 1998, is claimed under 35 U.S.C. §119.  
☒ A certified copy of the priority application is enclosed.
8. ☒ An UNSIGNED Declaration is enclosed.
9. ☐ An assignment of the invention to \_\_\_\_\_, Recordation Form Cover Sheet (Patents Only) and a check in the amount of \$40.
10. ☒ An Information Disclosure Statement, Form PTO 1449 and copies of 3 citations are enclosed.
11. ☒ Correspondence Address
- Altera Law Group  
10749 Bren Road East  
Minneapolis, Minnesota 55343
12. ☒ Address all correspondence to Michael B. Lasky.
13. ☒ Also enclosed: FORMAL DRAWINGS
14. ☒ A return postcard is enclosed.


Respectfully submitted,

Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343  
(952) 912-0527

Date: September 25, 2000

By: \_\_\_\_\_

Michael B. Lasky  
Reg. No. 29,555  
MBL/jsc



PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Muhonen, Ahti	Examiner:	UNKNOWN
Serial No.:	TO BE ASSIGNED	Group Art Unit:	TO BE ASSIGNED
Filed:	September 25, 2000	Docket No.:	781.378USW1
Title:	TRANSMISSION OF POINT-TO-MULTIPOINT SERVICES TO A DESTINATION AREA		

CERTIFICATE UNDER 37 C.F.R. 1.10:

'Express Mail' mailing number: EL492432164US

Date of Deposit: September 25, 2000

The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

By: Melissa Lange

Melissa Lange

**PRELIMINARY AMENDMENT**

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Please enter the following preliminary amendment into the above-referenced application.

**ABSTRACT**

Please insert the attached abstract into the application as the last page thereof.

**CLAIMS**

Please amend the claims as follows:

In claim 4, line 1, please replace "according to claim 1, 2 or 3" with --according to claim 1--.

In claim 7, line 1, please replace "according to claim 5 or 6" with --according to claim 5--.

In claim 10, line 1, please replace "according to claim 8 or 9" with --according to claim 8--.

In claim 11, line 1, please replace "according to claim 8,9, or 10" with --according to claim 8--.

In claim 14, line 1, please replace "according to claim 12 or 13" with --according to claim 12--.

In claim 15, line 1, please replace "according to claim 12,13 or 14" with --according to claim 12--.

In claim 18, line 1, please replace "according to claim 16 or 17" with --according to claim 16--.

#### **REMARKS**

The above preliminary amendment is made to insert an abstract page into the application and to remove multiple dependencies from the following claims:  
4,7,10,11,14,15 and 18.

Applicant respectfully requests that this preliminary amendment be entered into the record prior to calculation of the filing fee and prior to examination and consideration of the above-identified application.


If a telephone conference would be helpful in resolving any issues concerning this communication, please contact Applicant's attorney of record, Michael B. Lasky at 952-912-0527.

Respectfully submitted,

Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343  
(952) 912-0527

Date: September 25, 2000

By:

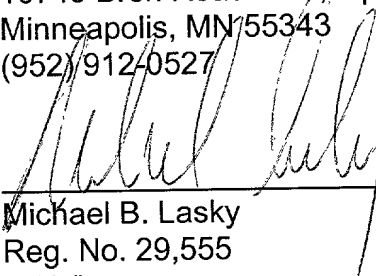  
\_\_\_\_\_  
Michael B. Lasky  
Reg. No. 29,555  
MBL/jsc

Year	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

Year	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

## TRANSMISSION OF POINT-TO-MULTIPOINT SERVICES TO A DESTINATION AREA



### BACKGROUND OF THE INVENTION

The invention relates to areal point-to-multipoint services in a mobile communication system and particularly to mapping of a logical name of a geographical destination area of a service to network element addresses in order to allow one and the same service request to be used for reaching service areas of even a plurality of service centres controlling point-to-multipoint services.

Mobile communication systems have been developed in an answer to a need to reach people when they are not at a fixed telephone terminal. With the increased use of various data transmission services in offices, different data services have been also introduced into mobile communication systems. Mobile communication networks, in turn, provide the user with an efficient access network to the actual data networks for mobile data transmission. For this purpose, various new forms of data services are being designed for existing and future mobile communication networks. Digital mobile communication systems, such as the pan-European mobile communication system GSM (Global System for Mobile Communication), support particularly well mobile data transmission.

The General Packet Radio Service GPRS is a new service in the GSM system and one of the objects of GSM Phase 2+ standardization at ETSI (European Telecommunication Standard Institute). The GPRS allows packet data transmission to be provided between mobile data terminals and external data networks, with the GSM network functioning as an access network. One of the requirements set to the GPRS is that it must interwork with different kinds of external data networks, such as the Internet or the X.25. In other words, the GPRS and the GSM network should be able to serve all users, irrespective of the data network the users wish to access through the GSM network. This means that the GSM network and the GPRS must support and process various kinds of network addressing and data packet formats. The processing of data packets also comprises their routing in the packet radio network. In addition, the users should be able to roam from the GPRS home network to another GPRS network, the operator backbone network of which may support a different protocol (CLNP, for example) than the home network

(X.25, for example). The GPRS network architecture is illustrated in Figure 1.

The GPRS service supports both point-to-point and point-to-multipoint transmissions. The function of a point-to-multipoint transmission is to allow a sender to transmit data to recipients in a destination area by using one and the same service request. The term 'data' in this application refers to any information relayed in a digital telecommunication system. The information may comprise digitized speech, inter-computer data traffic, telefax data, short program code segments, etc. The destination area is a geographical area determined by the sender either in the service request or when the initiation of a point-to-multipoint transmission is informed. The destination area can be determined either as a list of cells or a logical name. Since one logical name can be used to cover a large number of cells, most often the destination area is determined as a logical name. To control point-to-multipoint transmissions the GPRS network typically comprises a Point-To-Multipoint Service Centre PTM-SC, which is an essential element in the point-to-multipoint service. The centre receives service requests from a Service Requester and transmits the service to its service area. Actual point-to-multipoint services supported by the GPRS are Point-to-Multipoint Multicast PTM-M and Point-To-Multipoint Group Call PTM-G. A PTM multicast is broadcast in all the cells belonging to the destination area. A PTM group call is broadcast in the cells of the destination area in which at least one subscriber registered into the group is located.

A problem with the above described system is that it fails to determine how to map efficiently logical names in order to one or more network element addresses allowing the service to be transmitted to an entire geographical destination area that may cover a plurality of service areas of different packet radio networks or PTM service centres.

## BRIEF DESCRIPTION OF THE INVENTION

An object of the invention is thus to provide a method and an equipment implementing the method so as to allow the above mentioned problem to be solved. The object of the invention is achieved with a mobile communication system comprising at least one mobile communication network; at least one service centre for point-to-multipoint services; and at least one network node through which a point-to-multipoint transmission is transmitted to cells belonging to a destination area. the geographical destination area of the point-to-multipoint service being indicated in the system



as a logical name. The system is characterized in that it comprises memory means for mapping each predetermined logical name to one or more network element addresses of the system, and that a service centre is arranged to inquire, in response to a received service request, from the memory means the addresses of the network elements corresponding to the logical name of the destination area and to transmit a point-to-multipoint service via the network elements to the geographical destination area.

The invention also relates to a method, which can be utilized in the system of the invention, for transmitting a point-to-multipoint service of a mobile communication system to a destination area of the service indicated as a logical name in a service request, the mobile communication system comprising at least one mobile communication network, at least one service centre for point-to-multipoint services, and at least one network node through which the point-to-multipoint service is transmitted to the cells located within the destination area. The method of the invention is characterized by determining logical names for geographical destination areas of the service; maintaining an address list for each logical name in the mobile communication network, the address list being used for mapping a logical name to one or more network element addresses of the system; receiving a service request at a first service centre, the service request indicating the destination area as a logical name; mapping the logical name by means of the address list to one or more network element addresses; checking each address and, if an address is the address of a second service centre, forwarding the service request to the service centre concerned or, if an address is the address of a network node, transmitting the service via the node to those cells in the service area of the node which belong to the destination area of the service.

The invention also relates to another method, which can be utilized in the system of the invention, for transmitting a point-to-multipoint service of a mobile communication system to a destination area of the service, at least part of the destination area being outside the service area of a first service centre, the first service centre receiving a service request from a service provider. The method of the invention is characterized by setting up a connection from the first service centre to a second service centre; maintaining information about the address of the second service centre and its service area at the first service centre; receiving the service request indicating the destination area at the first service centre; checking at the first service centre whether at least part

of the destination area is within the service area of the second service centre; and, if yes, forwarding the service request to the second service centre.

The invention further relates to an area register that can be utilized in the system of the invention. The area register forms part of a mobile communication system comprising at least one network, the network comprising a service centre for point-to-multipoint services for transmitting a point-to-multipoint service to a geographical destination area indicated in a service request, the destination area being indicated as a logical name. The area register of the invention is characterized in that it comprises a list of logical names for at least one service centre and at least one network element address list of the system corresponding to each logical name in order to allow a logical name to be mapped to at least one system network element address; and processing means for receiving inquiries concerning the logical names and for replying to the inquiries.

The invention further relates to a service centre for point-to-multipoint transmissions, which can be utilized in the system of the invention, i.e. a service centre for transmitting point-to-multipoint services in a mobile communication system to a geographical destination area of a service, the service centre comprising reception means for receiving a service request, the service request having a destination area that can be indicated as a logical name. The service centre of the invention is characterized in that it comprises inquiry means for mapping the logical name given in the service request to at least one address for a network element of the system; and transmission means for transmitting the service to the destination area via each network element.

The invention is based on the idea that at the service centre that receives the service request the geographical area indicated by the logical name is linked to other service centres and/or to network nodes of the receiving service centre and to cells located within the area of the network nodes. The service is transmitted to the cells in a conventional manner through the network nodes, whereas a service request is forwarded to other service centres. The invention thus provides the advantage that logical names can be efficiently and reliably mapped to distribution addresses of the service. A further advantage the invention provides is that logical names are very easy to determine and one and the same destination area can have various different logical names. Another advantage is that with a single service request

the service requester can cover a wide area. The area does not need to be limited in any way according to network borders, network node service areas or other predetermined areas of the network, such as location areas. Furthermore, the network operator can add a new service centre to the network and divide the service area of a former service centre into service areas of the former and the new service centre in such a way that from the service requester's point of view the network functions as if the service areas had not been divided at all.

In a preferred embodiment of the invention the service request is transmitted unchanged to other service centres. This provides the advantage that the system does not need different service request messages according to who is the sender of the service request, or whether the service centre receiving the service request is located in the same network or in a different network; one and the same service request is always valid.

In another preferred embodiment of the invention the destination area of the service request can be indicated by using intermediate operators together with a plurality of logical names. This provides manifold alternatives for the determining of the destination area compared with the determining of destination areas by using only one logical name in a request.

In another preferred embodiment of the invention the service centre replaces the destination area of the service request with a destination area of the second service centre before the service request is transmitted to the destination area. This simplifies the determining of logical names in different networks and provides a means for preventing the service request to be transferred back and forth between the service centres.

In another preferred embodiment of the invention the service areas of the service centres overlap at least to some extent, the common area then belonging only to the service area of the service centre with a smaller load. This provides the advantage that the operator can secure an equal quality of service irrespective of the load of the first service centre that receives the service request.

The preferred embodiments of the mobile communication system, method, area register and service centre of the invention are disclosed in the accompanying independent claims.

## LIST OF DRAWINGS

In the following the invention will be described in greater detail in connection with preferred embodiments and with reference to the accompanying drawings, in which

5 Figure 1 is a block diagram illustrating the essential elements of a packet radio system of the invention;

Figure 2 is a block diagram illustrating an area register of a first preferred embodiment of the invention;

Figure 3 illustrates logical names shown as a hierarchical structure;

10 Figure 4 is a block diagram illustrating a system of the invention;

Figure 5 is a signalling diagram illustrating signalling between some network elements of the packet radio system in the first preferred embodiment of the invention; and

15 Figure 6 is a block diagram illustrating the most essential elements of a point-to-multipoint service centre of the invention.

## DETAILED DESCRIPTION OF THE INVENTION

20 In the following the preferred embodiments of the invention will be described with reference to GPRS packet radio networks without, however, restricting the invention to any specific packet radio system. It is to be noted that a packet radio network only provides a physical connection between a PTM service centre and a service receiver, therefore its detailed operation and structure are not essential to the invention. Specifications for mobile communication systems in general and for the GPRS system in particular develop rapidly. The location of different functionalities in the network  
25 elements may change. Therefore all words and expressions used should be interpreted in their broadest sense; they are used to describe and not to limit the invention.

30 Figure 1 shows one example of a GPRS packet radio network PLMN. A GPRS operational environment 1 comprises one or more subnetwork service areas interconnected by an Intra-PLMN GPRS Backbone Network 2. A subnetwork comprises a number of packet data service nodes SN, which in this context will be referred to as serving GPRS support nodes SGSN, each connected to a GSM mobile communication network 3 - typically to base station systems BSS - in such a way that the network can provide a packet  
35 service for mobile data terminals MS via several base stations, i.e. cells. The

intermediate mobile communication network 3 provides packet-switched data transmission between a support node and mobile data terminals. In a cellular packet radio network, each support node SGSN controls packet service within one or more cells. A data terminal MS located in a cell communicates over the mobile communication network with the support node SGSN into the service area of which the cell belongs to. Different subnetworks are in turn connected to an external data network 4, for example to a public switched data network PSPDN, an Internet network or an integrated services digital network ISDN via specific GPRS gateway support nodes GGSN. The GPRS thus allows packet transmission to be provided between mobile data terminals and external data networks, with the GSM network 3 functioning as an access network. Different mobile communication networks are interconnected by an Inter-PLMN Backbone Network 5. The GPRS operational environment 1 between the mobile communication networks comprises a Border Gateway BG. The GPRS subscriber information and routing information are stored in a home location register HLR of the GSM network.

To control point-to-multipoint transmissions the GPRS network typically comprises a Point-To-Multipoint Service Centre PTM-SC. The service centre PTM-SC is an essential element in the point-to-multipoint service and responsible for the geographical routing of messages. It receives service requests from a Service Requester SR and takes care of transmitting the service via a support node or support nodes SGSN within its service area. In other words, it handles the scheduling of messages, their transmission and retransmission according to given user parameters. Some of the service centre operations can be decentralized into other network elements, an example of which is a support node SGSN which can at least to some extent take care of the geographical routing, for example. For the time being, GPRS specifications do not determine how a PTM service centre is connected to a network. Figure 1 shows one alternative in which the PTM service centre is connected to the internal backbone network 2. The PTM service centre of the invention will be described in greater detail in connection with Figure 6.

In the system of the invention the Service Requester SR is not limited in any way. An essential aspect is that service requests relating to similar services are always transmitted in a similar format to the service centre PTM-SC. The format naturally depends on the point-to-multipoint service used. The service requester can thus be an independent service provider

transmitting its service requests via other networks 4. The service requester SR can also have a direct connection to a service centre PTM-SC located in the network, as shown in the example of Figure 1. The service requester can also be a network element or a terminal the service request of which is forwarded to the service centre PTM-SC. The service requester can also be a second service centre PTM-SC. The service request is similarly processed irrespective of whether it is received from the same network or from another network. In the following PTM service centres which receive service requests from service centres of another network and which can, correspondingly, send requests to them are referred to as gateway service centres. PTM service centres receiving service requests only from the PTM service centres of the same network are called dedicated service centres.

A mobile communication network of the invention also comprises at least one area register AR for controlling the geographical routing of the service. The area register AR can be a separate network element as shown in Figure 1. It can also be integrated into the service centre PTM-SC. In addition, part of the area register can be decentralised into serving support nodes SGSN, for example. To balance the load of an individual area register, the network can also comprise a plural number of identical area registers AR. The updating of identical area registers must be centralized. If the network comprises a plurality of service centres PTM-SC, each of them can have a separate area register AR or they can use a common area register.

Figure 2 is a block diagram illustrating an area register AR of a first preferred embodiment of the invention, the register being a centralized independent area register. In this case the service centre PTM-SC does not know the cell structure of the network or how logical names are mapped to network element addresses. Correspondingly, the support node SGSN does not know the correspondence between logical names and the cells within the support node's service area. Data located in a centralized area are easily updated. Other embodiments allow the functions and information of the area register to be decentralized and thereby network signalling load to be reduced. The area register AR comprises an application part 6, database 7 and communication part 8. The communication part 8 receives inquiry messages concerning logical names and replies to the network element that supplied an inquiry. Via the communication part the operator or the PTM service centre can also update the data in the database. In addition, the communication part

8 can be arranged to transmit to the application part 6 information indicating the network element the inquiry was received from.

The database 7 comprises four separate lists: list 71 of the logical names, list 72 of the service centres PTM-SC, list 73 of the support nodes SGSN and list 74 of the cells. The operator determines a number of logical names that can be used as a name for a destination area of a point-to-multipoint service. In addition, each subscriber can have a separate group of logical names forming part of the subscriber information of the GPRS service. The logical names can cover areas that are either partly or completely within the area of another mobile communication network. All the logical names concerned are included in the logical names list 71. The list 72 of the service centres PTM-SC comprises the service centres located in the mobile communication network concerned, and those service centres of other mobile communication networks that operate as gateway service centres. The list 73 of the support nodes SGSN comprises the serving support nodes SGSN of the mobile communication network concerned. Correspondingly, the cell list 74 comprises the cells of the mobile communication network concerned. The database also comprises the mapping of information between different lists as shown by arrows 75. Each logical name is provided with a separate virtual list which in this context will be referred to as a name-specific list. If the geographical area covered by a logical name, or part of it, is within the area of the network concerned, the name-specific list comprises all the cells of the mobile communication network concerned that are determined for the geographical area corresponding to the logical name; all support nodes SGSN within the area of which the above mentioned cells belong to; and all service centres PTM-SC of the mobile communication network concerned within the service area of which the above mentioned support nodes SGSN belong to. If the geographical name covered by the logical name, or part of it, is within the area of another mobile communication network, the name-specific list comprises the addresses of the service centres PTM-SC of the mobile communication networks into the area of which the area covered by the logical name concerned extends to. Correspondingly, each home network service centre PTM-SC included in the list 72 of the service centres PTM-SC has a separate virtual list of the support nodes SGSN belonging to its service area. Furthermore, each support node SGSN included in the list 73 of the support nodes SGSN has a separate virtual list comprising each cell that belongs to its

routing area. The arrows 75 in the database shown in Figure 2 illustrate the contents of the virtual lists described.

The application part 6 carries out the inquiry operations of the database and uses them to compile a reply that is forwarded by the connection part. Examples of the replies are described in connection with Figure 5. In the first preferred embodiment the destination area included in the service request can be formed of a plural number of different logical names and their intermediate logical operators, such as a logical AND and a logical NOT. Other suitable logical operators can also be used. The application part 6 identifies the logical operators and uses them when making database inquiries and formulating the reply. The application part 6 preferably also comprises a hierarchical structure of the logical names shown in Figure 3. With the structure it searches for the logical names it will use for making the database inquiries described in connection with Figure 3.

A minimum requirement for the area register of the invention is that in addition to the logical names list 71 it comprises either the service centres list 72 or the cell list 74 and the support nodes list 73. If the area register only comprises the logical names list 71 and the service centres list 72, it can only serve a service centre which does nothing but transmits service requests to other service centres, for example to the service centre of an independent service requester. If the area register only comprises the logical names list 71, the cell list 74 and the support nodes list 73, it cannot transmit service requests to other service centres, but only transmit the service to a destination area that is within its service area.

Logical names are preferably determined as a hierarchical structure shown in the example of Figure 3. Names that could be used, in addition to geographical names, include network operator names; for example, subsets of 'Finland' could be 'Radiolinja' and 'Sonera'. Using the hierarchical structure together with logical operators allows logical names to be used in a flexible and varied manner to determine a destination area. In addition, logical names are then fairly simple to add and remove. The first preferred embodiment offers the following three different alternatives for determining the destination area of the service. Alternative 1 is 'Finland NOT other'; alternative 2 is 'Lapland AND capital city area'; alternative 3 is 'Lapland AND Helsinki AND Espoo AND Vantaa'. This structure allows a destination area comprising multiple different areas not dependent on each other to be determined for the



point-to-multipoint service. The area register AR can utilize the above hierarchical structure in a second preferred embodiment to map a logical name.

Figure 4 is a block diagram illustrating an example of a system of the invention, the system comprising three separate mobile communication networks PLMN1, PLMN2 and PLMN3. The operator of the mobile communication network PLMN1 has service agreements with the operators of the networks PLMN2 and PLMN3. In the mobile communication network PLMN1, a service centre PTM-SC1 operates as a gateway service centre within a service area A1 of the entire mobile communication network. In addition, the point-to-multipoint service area of the centre is an area A1-1. A service centre PTM-SC2 serves an area A1-2 and, correspondingly, a service centre PTM-SC3 an area A1-3. In reality the service areas cover the network completely, but for the sake of clarity they are shown separately. The network comprises one centralized area register AR1. In the mobile communication network the service request from the service requester of the mobile communication network PLMN1 is preferably routed to the service centre in which the operator has determined the service requester to be located, irrespective of the service centre in the service area of which the service requester is when transmitting the service request. For example, the service requests coming from a service requester of a mobile terminal located in the area A1-1 are always received at the PTM-SC2 because in the subscriber information, the PTM-SC2 is determined as the service centre of the service requester.

The mobile communication network PLMN2 comprises only one service centre, PTM-SC4, the service area A2 of which covers the entire network. The PTM-SC4 is a gateway service centre and into the service centre PTM-SC4 is integrated an area register AR2 of the mobile communication network PLMN2.

The mobile communication network PLMN3 comprises two service centres, the service areas of which both comprise the entire network. A service centre PTM-SC5 functions as a gateway service centre. Figure 4 shows an example of a dedicated service centre PTM-SC6 which receives service requests only from the service centre PTM-SC5. The service centre PTM-SC5 is a load controlling service centre; it decides when the service centre PTM-SC6 is to be used to balance the load on the centres. An area register AR3 of

the mobile communication centre PLMN3 is a centralized register. The service centre PTM-SC5 determines the service centre into the service area of which the common service area A3 belongs to; it cannot belong to the areas of both at the same time. When the service centre PTM-SC5 receives a service request concerning the area A3, it either relays the request to the service centre PTM-SC6 or transmits it to the area A3.

The following example illustrates the mapping of a logical name to network element addresses in the first preferred embodiment in the mobile communication system according to Figure 4. Let us assume that the mobile communication networks PLMN1 and PLMN3 both cover the whole of Finland and the PLMN2 is a mobile communication network covering Sweden. The area A1-1 of the mobile communication network PLMN1 is capital city area, the area A1-2 is Lapland and the area A1-3 is Other. The name-specific list of a logical name 'Nordic countries' of the area register AR1 for the service centre PTM-SC1 comprises the addresses of the service centres PTM-SC2, PTM-SC3, PTM-SC4 and PTM-SC5, the support nodes serving the area A1-1 and the cells within the area A1-1. The name-specific list of the logical name 'Nordic countries' of the area register AR1 for the service centre PTM-SC2 comprises the support nodes serving the area A1-2 and the cells within the area A1-2. Correspondingly, the name-specific list of the logical name 'Nordic countries' of the area register AR1 for the service centre PTM-SC3 comprises the support nodes serving the area A1-3 and the cells within the area A1-3. The name-specific list of the logical name 'Nordic countries' of the area register AR2 comprises the support nodes serving the area A2 and the cells within the area A2. The name-specific list of the logical name 'Nordic countries' of the area register AR3 comprises the support nodes serving the area A3 and the cells within the area A3. In other words, one and the same logical name has a service-area-specific set of addresses within the system. In the second preferred embodiment the service request is not transmitted unchanged to other service centres, but the logical name is replaced with a second logical name or a cell list, and therefore a service-area-specific set of addresses is not needed for the logical names. For example, the service centre PTM-SC1 receives a service request the destination area of which is 'Nordic countries'. It transmits the service request to the service centre PTM-SC2. The transmitted service request is otherwise similar to the original one, except that the destination area 'Nordic countries' has been replaced with 'Lapland'.

Figure 5 illustrates signalling according to the first preferred embodiment of the invention between network elements in a system described in Figure 4. In step 5-1 the service centre PTM-SC1 receives from the service requester SR a service request PTMServiceRequest in which the logical name of the geographical destination area is 'Nordic countries'. In step 5-2 the PTM-SC1 sends an inquiry message PTMAddressListRequest to the area register AR1 to obtain the addresses of the network elements of the logical name 'Nordic countries'. In step 5-3 the service centre PTM-SC1 receives from the area register AR1 a reply message PTMAddressListConfirm comprising the network element addresses which are, in this example, the service centres PTM-SC2, PTM-SC3, PTM-SC4 and PTM-SC5, and the support nodes SGSN1 and SGSN2 serving the area A1-1. The reply message also comprises a cell list for the support node SGSN1, because the support node SGSN1 does not have a connection to the area register AR1. The service centre PTM-SC1 starts to process the reply. In step 5-4 the service centre PTM-SC1 sends each service centre PTM-SC2-5 included in the reply message the service request PTMServiceRequest received in step 5-1. The logical name of the destination area is still 'Nordic countries'. In step 5-5 the service centres deliver the service to their respective areas; they ask their area registers for the network element addresses corresponding to the logical name, send the service messages to the network elements concerned, and then transmit the service to the receivers. In step 5-6 the service centre PTM-SC1 sends the serving support node SGSN1 a service message PTMMessage. The service message comprises the data included in the service request received in step 5-1, and a list of the cells within the area of the serving support node SGSN1 to which the service is to be transmitted. In step 5-7 the SGSN1 uses the base station system to send the service message data to the service receivers via the cells in the list that are within its area. In step 5-8 the service centre PTM-SC1 sends the serving support node SGSN2 a service message PTMMessage, which includes the data of the service request received in step 5-1 and the logical name 'Nordic countries' of the destination area. In step 5-9 the serving support node SGSN2 sends an inquiry message PTMCellListRequest to the area register AR1 to find out the cells within its service area that are covered by the geographical area of the logical name 'Nordic countries' of the service request. In step 5-10 the serving support node SGSN2 receives a cell list in a reply message PTMCellListConfirm from the

area register AR1. In step 5-11 the serving support node SGSN2 uses the base station system to send the service message data to the service receivers via the cells within its area.

In the second preferred embodiment the message received in step 5-3 comprises the logical name of a subset corresponding to a logical name given in connection with the serving PTM service centre. The reply message could be, for example, the following: PTMAAddressListConfirm(..., PTM-SC2 (Lapland), PTM-SC4(Sweden)...). In step 5-4 the service centre PTM-SC1 sends each service centre PTM-SC2-5 included in the reply message the service request PTMServiceRequest received in step 5-1. Before the service request is sent, the logical name of the destination area is replaced by the logical name of the corresponding subset. For example, a PTMServiceRequest message with Lapland as the destination area is sent to the service centre PTM-SC2, whereas the destination area of the PTMServiceRequest message to be sent to the service centre PTM-SC4 is Sweden. Otherwise the signalling in the second preferred embodiment does not differ from that of the first preferred embodiment.

The steps described above in connection with Figure 5 are not in an absolutely chronological order; some of them can take place simultaneously or in another order, as for example the steps 5-4, 5-6 and 5-8. The names of the signalling messages can differ from those given above, without the data transmitted in the messages being changed. The signalling messages to be selected from among those shown in Figure 5 and the network elements they are to be sent to fully depend on the destination area and on the data associated with the destination area in the area register. The messages can also comprise more information than in the above description. The information transmitted in one signalling message as shown in Figure 5 can also be transmitted using a plural number of messages. For example, in a PTM multicast transmission the service request PTMServiceRequest is a single signalling message comprising the geographical destination area and the data to be transmitted. In a PTM group transmission, the service request PTMServiceRequest comprises a plural number of signalling messages, one of the messages containing information that allows the destination area to be determined. In a group transmission data can be sent in various different messages. Correspondingly, if the area register is integrated into the PTM service centre and/or part of it is placed in the serving support nodes, the

inquiry messages sent to the area register and the reply messages sent by it belong to internal data transmission within the network element concerned; they are not signalling messages to be sent in the network.

Figure 6 is a block diagram illustrating the essential elements of the point-to-multipoint transmission service centre PTM-SC of the invention. The service centre PTM-SC comprises a connection part 9 for transmitting various messages to the network and from there to different parts of the service centre; reception means 10 for receiving service requests and service related messages; a management part 11 for processing a received service request as shown in Figure 5, for example; and transmission means 12 for transmitting service requests and service related messages to the right network elements.

In principle the reception means 10 can receive service requests from terminals of the mobile communication system; from users of a fixed network, the Internet or a packet network; from other service centres; or via a direct connection. The reception means 10 of the service centre can alternatively be arranged to receive service requests only from particular service requesters. For example, dedicated service centres receive service requests only from service centres, and the service centre of an independent service requester can receive service requests only via a direct connection.

The management part 11 analyses the destination area indicated in the service request and takes care of the geographical routing of the request. The management part 11 is connected to the area register. The management part 11 inquires from the area register the network elements corresponding to the logical name of the destination area of the service request. After having received a reply, it provides the transmission means 12 with a routing instruction and a right message for each network element, as shown in Figure 5. Depending on the embodiment, it either keeps the logical name of the destination area unchanged or replaces it with another logical name obtained from the area register's reply.

If the destination area given in the service request is a list of cells, the management part 11 provides service related messages to the transmission means directly for transmission to the cells included in the list. Alternatively, the management part 11 can check from the area register the cells that belong to its service area and those that belong to the service area of another service centre. The transmission means 12 are then provided with service messages for transmission to the cells within the service area of the

service centre concerned and with a service request, including a list of cells, for transmission to a second service centre. Before supplying the service request to the transmission means, the management part 11 can remove the cells belonging to its area from the cell list given in the service request.

5 In addition to the above, the management part 11 can take care of quality of service, scheduling, and management of subscriber information. The management part 11 can also check from a subscriber data register, such as a home location register, certain subscriber-specific characteristics, for example transmission times and restrictions, if any, concerning a distribution area.

10 The transmission means 12 of the service centre PTM-SC are responsive to the management part. They forward service related messages and service requests towards the correct addresses. Since the GPRS supports various different transmission protocols, the transmission means 12 know the correct protocols to be used for sending messages and service requests.

15 Service centres can also be integrated with each other in order to balance their load. In such case one of the service centres is the main service centre, the other service centres being sub-service centres. At least one sub-service centre must be provided in this embodiment. The sub-service centre need not be a dedicated service centre, and part of its service area can be outside the service area of the main service centre. What is essential about integrated service centres is that two service areas include a portion providing common service area, referred to as a transferable service area in this context. The main service centre comprises load control means 13 receiving  
20 information about the load of the sub-service centres and computing load differences. When a load difference between two service centres reaches a threshold value predetermined by the operator, the control means command the area register to transfer the transferable service area to belong to the service area of the service centre with a smaller load. The load control means  
25 13 can be arranged to inquire load information at predetermined intervals. The sub-service centres comprise transmission means for load information (not shown in the Figure) which transmit information concerning their load continuously, at predetermined intervals or when inquired by the main service centre, depending on the embodiment in question. The main service centre  
30 does not necessarily have a separate service area. Instead, it can be a service  
35

centre receiving all service requests and distributing them to dedicated sub-service centres.

It is to be understood that the above description and the related drawings are only intended to illustrate the present invention. It will be apparent to those skilled in the art that many variations and modifications can be made to the invention without departing from the scope and spirit of the invention disclosed in the accompanying claims.

## CLAIMS

1. A mobile communication system comprising at least one mobile communication network (PLMN); at least one service centre (PTM-SC) for point-to-multipoint services; and at least one network node (SGSN) through which a point-to-multipoint service is transmitted to cells belonging to a destination area, the geographical destination area of the point-to-multipoint service being indicated in the system as a logical name,

**characterized** in that

the system comprises memory means (AR) for mapping each predetermined logical name to one or more network element addresses (PTM-SC, SGSN) of the system, and that

a service centre (PTM-SC) is arranged to inquire, in response to a received service request, from the memory means (AR) the addresses of the network elements (PTM-SC, SGSN) corresponding to the logical name of the destination area and to transmit the point-to-multipoint service via the network elements to the geographical destination area.

2. A mobile communication system according to claim 1, **characterized** in that

the service centre (PTM-SC) is also arranged to check whether the network element address is the address of a second service centre and, if yes, to transmit the service request to the second service centre.

3. A mobile communication system according to claim 2, **characterized** in that

the memory means (AR) are arranged to link to the address of the second service centre associated with the logical name a second logical name corresponding to the logical name in the service area of the second service centre, and

the service centre (PTM-SC1) is arranged to replace the logical name given in the service request with said second logical name before the service request is transmitted to the second service centre (PTM-SC2).

4. A mobile communication system according to claim 1, 2 or 3, **characterized** in that

the logical name of the destination area can be determined by means of at least two logical names and their intermediate logical operator, the logical operator indicating how the areas of the logical names relate to each other, and



the memory means (AR) are arranged to map the logical name of the destination area that is formed by the two or more logical names and the intermediate logical operator between successive names to one or more network element addresses of the system.

5 5. A method for transmitting a point-to-multipoint service of a mobile communication system to a destination area of the service indicated as a logical name in a service request, the mobile communication system comprising at least one mobile communication network, at least one service centre for point-to-multipoint services, and at least one network node through  
10 which the point-to-multipoint service is transmitted to the cells located within the destination area,

**characterized** by the method comprising the steps of  
determining logical names for geographical destination areas of the  
service;

15 maintaining an address list for each logical name in the mobile communication network, the address list being used for mapping a logical name to one or more network element addresses of the system;

receiving a service request (5-1) at a first service centre, the service request indicating the destination area as a logical name;

20 mapping the logical name by means of the address list to one or more network element addresses (5-2 and 5-3), and

transmitting the service via the network elements to the geographical destination area.

25 6. A method according to claim 5, **characterized** by the method comprising the steps of

checking the address of each network element;

if the address is an address of a second service centre, forwarding the service request to it (5-4); and

30 if the address is a network node address, transmitting the service via the node to those cells in the service area of the node that belong to the destination area (5-6, 5-8) of the service.

7. A method according to claim 5 or 6, **characterized** by the method comprising the steps of

35 determining at least one logical operator for indicating the destination area by using at least two different logical names and their intermediate logical operator, and

mapping each logical name to one or more network element addresses; and

combining the network element addresses as determined by the logical operator.

5 8. A method for transmitting a point-to-multipoint service of a mobile communication system to a destination area of the service, at least part of the destination area being outside the service area (A1-1) of a first service centre (PTM-SC1), the first service centre receiving a service request from a service provider,

10 **characterized** by the method comprising the steps of  
setting up a connection from the first service centre to a second service centre (PTM-SC2);

maintaining information (AR1) about the address (PTM-SC2) of the second service centre and its service area (A1-2) at the first service centre;

15 receiving the service request indicating the destination area (A1) at the first service centre;

checking at the first service centre (PTM-SC1) whether at least part of the destination area is within the service area of the second service centre;

and, if yes,

20 forwarding the service request to the second service centre (PTM-SC2).

9. A method according to claim 8, **characterized** in that, when at least part of the destination area is within the service area of the second service centre, the method further comprises the steps of

25 setting the part of the destination area which is within the service area of the second service centre as the destination area of the service request received at the first centre, and

forwarding the service request to the second service centre.

30 10. A method according to claim 8 or 9, **characterized** in that

at least part of the service area of the second service centre is within the service area of the first centre, the common service area being referred to as a transferable service area, and

the method further comprising the steps of

35 comparing the load of the first service centre with the load of the second service centre;

determining a threshold value for the difference between the loads;  
and,

when the load difference between the service centres reaches the threshold value, determining the transferable service area to belong within the service area of the service centre with a smaller load.

11. A method according to claim 8, 9 or 10, **characterized** in that the destination area of the service request received by the first service centre is indicated as a list of cells.

12. An area register (AR) which forms part of a mobile communication system comprising at least one network, the network comprising a service centre for point-to-multipoint services for transmitting a point-to-multipoint service to a geographical destination area indicated in a service request, the destination area being indicated as a logical name, **characterized** in that the area register comprises

a list (71) of logical names for at least one service centre and at least one network element address list (72, 73) of the system corresponding to each logical name in order to allow a logical name to be mapped to at least one system network element address; and

processing means (6) for receiving inquiries concerning the logical names and for replying to the inquiries.

13. An area register according to claim 12, **characterized** in that the processing means (6) are arranged to

identify logical operators and  
map the logical name of a destination area formed by two or more logical names and an intermediate logical operator between successive names to one or more network element addresses of the system.

14. An area register according to claim 12 or 13, **characterized** in that at least one logical name (Nordic countries) is divided into logical names of a lower hierarchical level (Finland, Sweden) so that the geographical destination area of the logical name of the higher hierarchical level is formed of the geographical destination areas of the logical names of the lower hierarchical level.

15. An area register according to claim 12, 13 or 14, **characterized** in that it comprises updating means (8) for adding logical names to and for removing them from the list (71) of logical names and for adding network element addresses to and for removing them from the

network element address list (72, 73).

16. A service centre (PTM-SC) for transmitting point-to-multipoint services in a mobile communication system to a geographical destination area of the service, the service centre comprising reception means (10) for receiving a service request, the service request having a destination area that can be indicated as a logical name,

**characterized** in that the service centre further comprises inquiry means (11) for mapping the logical name given in the service request to at least one network element address of the system, and transmission means (12) for transmitting the service to the destination area via each network element.

17. A service centre according to claim 16, **characterized** in that it comprises

control means (11) for checking whether a network element is a second service centre, and

if yes, the transmission means (12) are arranged to forward the service request to the second service centre.

18. A service centre according to claim 16 or 17, **characterized** in that it comprises

load means (13) for monitoring the load of the service centre itself and that of the second service centre, and

determining means (11) responsive to the load means for re-determining the service area of the second service centre.

1/3

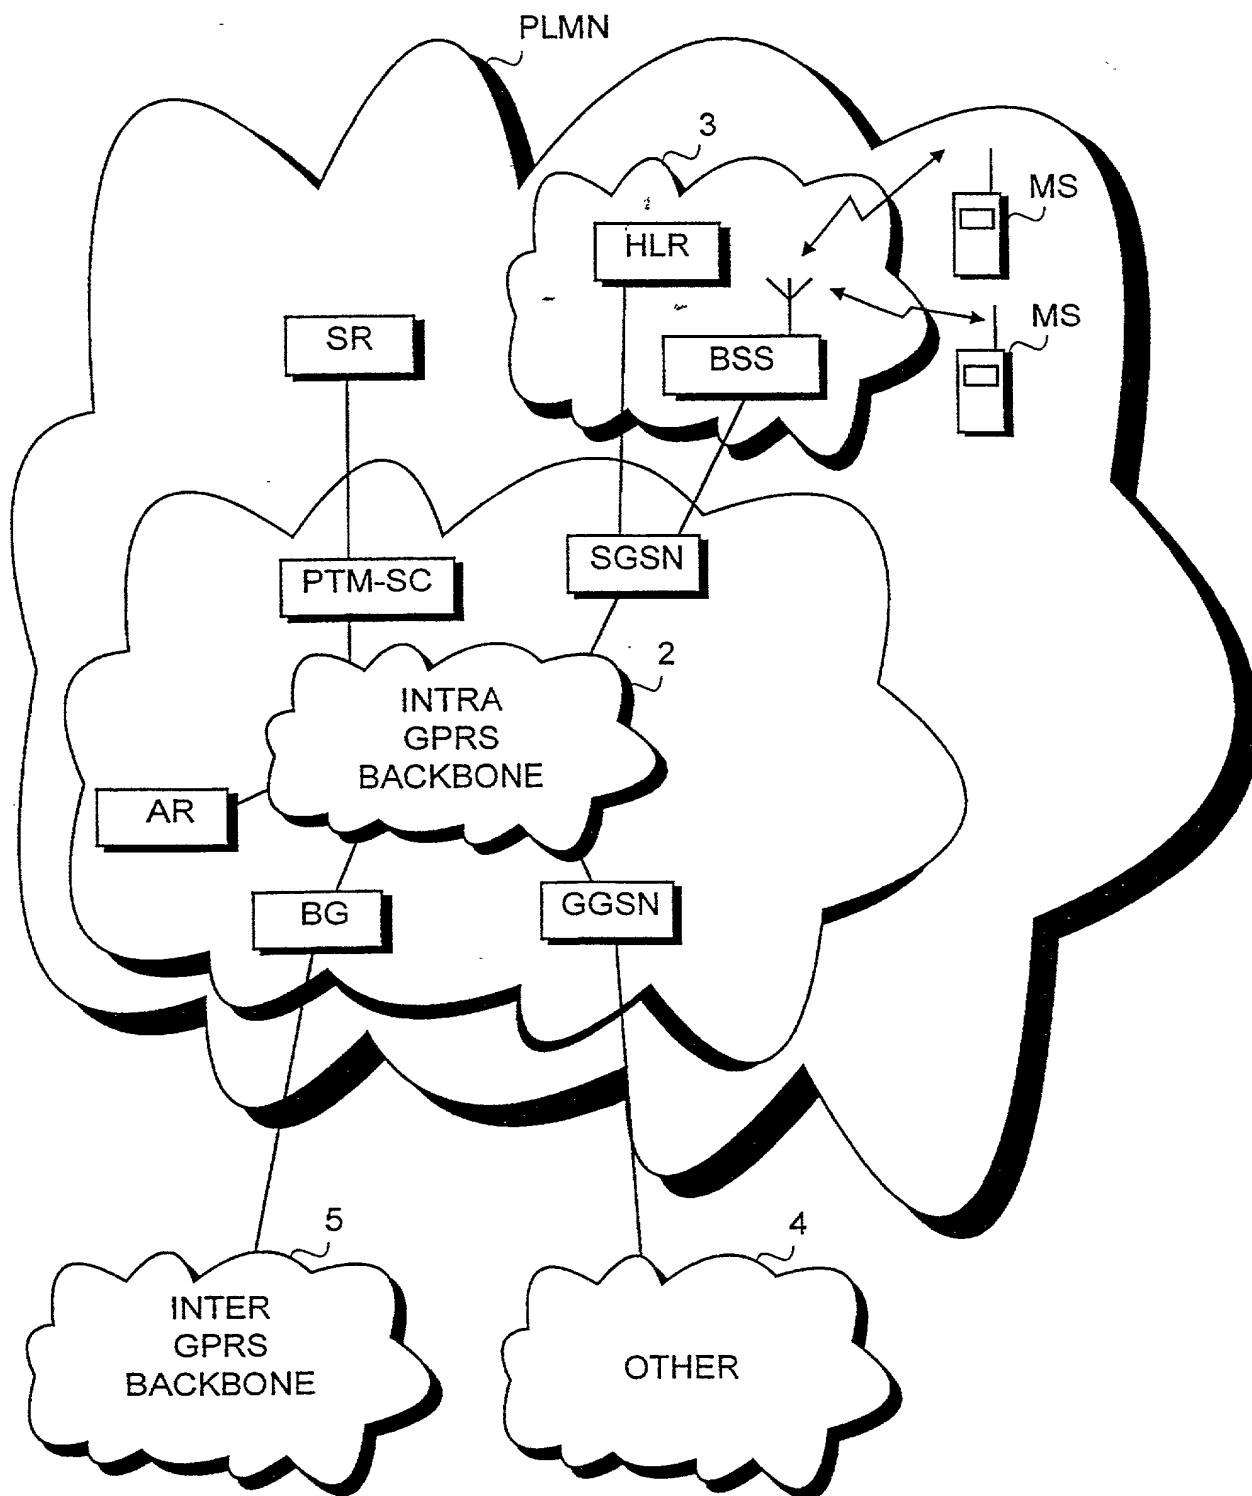


FIG.1

2/3

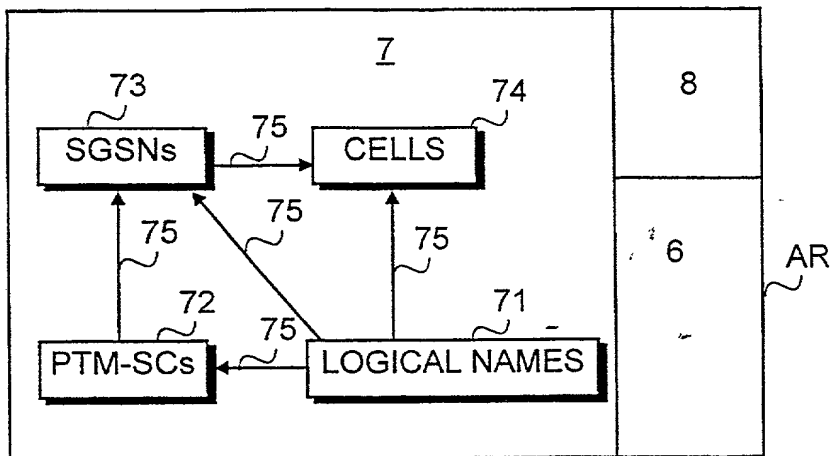


FIG. 2

FIG. 3

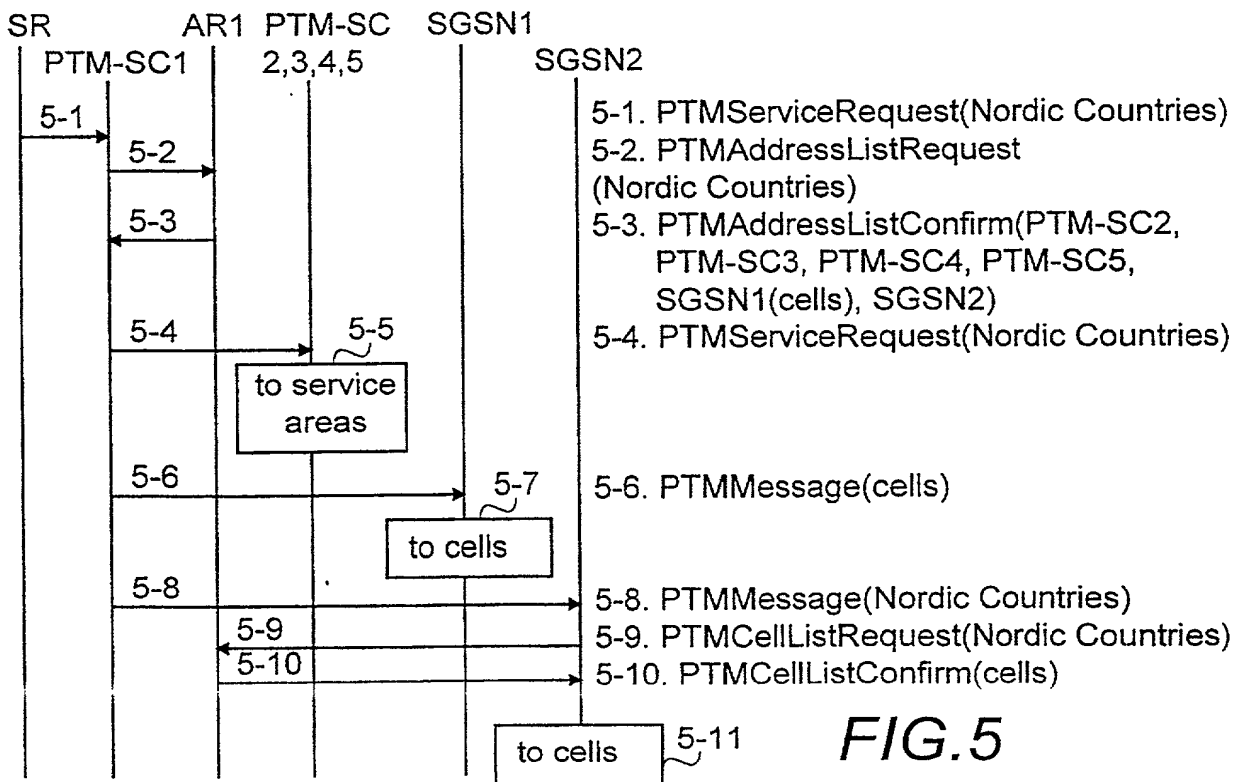
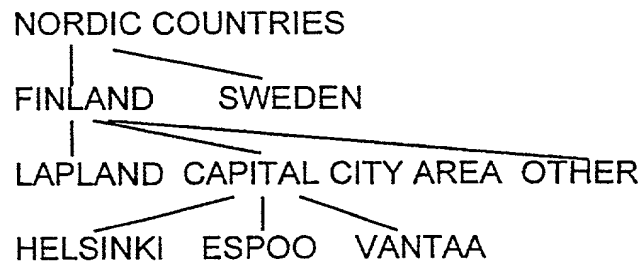


FIG. 5

3/3

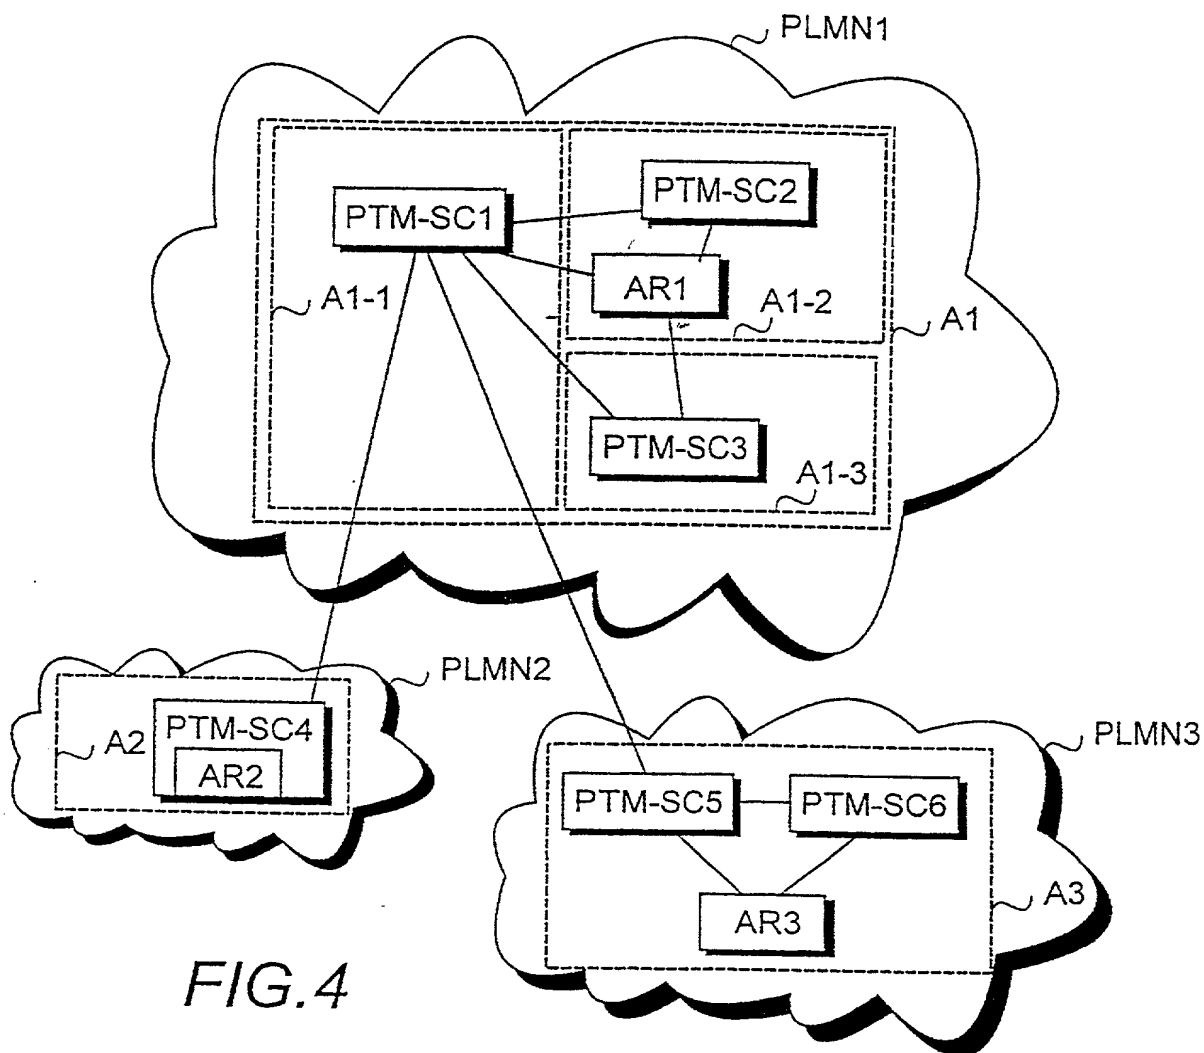


FIG. 4

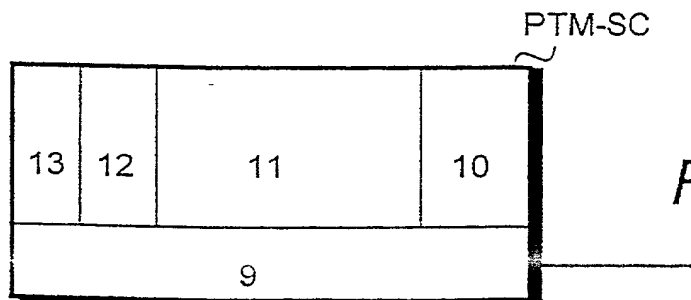


FIG. 6

**Altera Law Group, LLC****Declaration and Power of Attorney Patent Application  
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**TRANSMISSION OF POINT-TO-MULTIPOINT SERVICES TO A DESTINATION AREA**

the specification of which

- ☐ is referred to by Altera reference number on a separate document  
☒ is attached hereto  
☐ was filed on \_\_\_\_\_ as application serial no. \_\_\_\_\_ and or PCT International  
 Application number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 980684	Country Finland	Day/Month/Year Filed 26 March 1998
Number	Country	Day/Month/Year Filed
Number	Country	Day/Month/Year Filed



I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. or International Application(s)		
Serial Number PCT/FI99/00250	Day/Month/Year Filed 26 March 1999	Status (patented, pending, abandoned) Pending
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Steven R. Funk      Reg. No. 37,830  
David W. Lynch      Reg. No. 36,204  
Karen D. McDaniel      Reg. No. 37,674

Mark A. Hollingsworth      Reg. No. 38,491  
Michael B. Lasky      Reg. No. 29,555  
Iain A. McIntyre      Reg. No. 40,337

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Altera Law Group, LLC otherwise.

Please direct all correspondence in this case to Altera Law Group, LLC at the address indicated below:

Michael B. Lasky  
Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343

Full Name of Sole or First Inventor		
Family Name Muhonen	First Given Name Ahti	Second Given Name
Residence and Citizenship		
City of Residence Helsinki	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Italahdenkatu 5 B 37	City FIN-00210 Helsinki	State & Zip Code or Country Finland
Signature of Inventor		Date